

Cport3232-2AD220

32×RS232/485/422 Ports to 2×1G Fiber/Copper Ports Rack Mount Serial Server



- 32 × RS232/485/422 ports to 2 × 1G fiber/copper combo ports
- Support UDP, TCP, Modbus, HTTPD, WebSocket, MQTT, and virtual serial port
- Modbus RTU/ASCII to Modbus TCP protocol conversion, support Modbus RTU/ASCII over TCP transparent transmission.
- Support the standard MQTT protocol and can connect to Alibaba Cloud, OneNet, Tencent Cloud, Huawei Cloud, and other cloud platforms
- Support MixView for batch configuration and firmware upgrade
- External independent hardware watchdog designed to prevent crashes
- AC85~264V / DC110~370V redundant power inputs
- High-strength metal shell, IP40-rated housing protection
- Fanless enclosure heat dissipation, -40 °C ~ +75 °C working temperature range

Product Description

Cport3232-2AD220 is a rack-mount Serial-to-Ethernet server powered by a 32-bit dual-core ARM Cortex-A7 processor running at up to 1 GHz and features an external hardware watchdog. The power supply, Ethernet ports, and serial interfaces all include high-level ESD, surge, and EFT protection, ensuring strong anti-interference performance and reliable multi-serial to Ethernet data transmission for industrial applications.

This serial server provides 32 × independent RS232/485/422 serial ports, each configurable with different operating modes and baud rates from 300 bps to 460800 bps. It also offers 2× 1G Ethernet ports, supporting both copper and SFP fiber options. With a built-in TCP/IP protocol stack, Cport3232-2AD220 enables traditional RS232/485/422 devices to connect to Ethernet easily and securely.

The industrial-grade Serial-to-Ethernet servers from COME-STAR support web-based configuration for a wide range of network management functions, including serial/network operation modes, serial forwarding, NIC mode, DNS, access control, IP/MAC filtering, log management, email alarms, SNMP alarms, serial port restart, and system management. They support multiple communication modes such as UDP Client/Server/Multicast, TCP Client/Server, Modbus RTU/ASCII Master/Slave, RealCOM_MCP/CCP/MW, Pair Connection Master/Slave, HTTPD Client, WebSocket Client, and MQTT, enabling flexible Serial-to-Ethernet and Modbus TCP conversions.

Built with industrial-grade components, Cport3232-2AD220 offers wide voltage and temperature tolerance, lightning protection, strong EMC immunity, high reliability, and high performance, making it well-suited for harsh industrial environments. They are essential communication devices for industrial IoT development.

Product Features

- Adopt a 32-bit dual-core ARM Cortex-A7 processor running at up to 1 GHz
- Provide 2 × Gigabit Ethernet combo ports supporting copper or SFP fiber, configurable as two independent network segments or cascading ports
- Support selectable baud rates from 600 bps to 460800 bps
- Support UDP Client, UDP Server, and UDP Multicast modes for point-to-point, point-to-multipoint, or multipoint-to-multipoint fast communication
- Support TCP Client and TCP Server modes with up to 8 simultaneous connections for each mode, and support RFC2217 for dynamic modification of serial parameters
- Support Pair Connection Master/Slave mode, enabling paired operation with simple configuration
- Support Modbus RTU/ASCII Master/Slave and bidirectional conversion between Modbus TCP and Modbus RTU/ASCII
- Support Modbus slave readahead, with automatic learning of up to 64 RTU or 32 ASCII commands per port for fast response
- Support RealCOM_MCP/CCP/MW modes for mapping network ports to local virtual COM ports
- Support HTTPD Client mode to perform GET and POST communication with HTTP servers
- Support WebSocket Client mode for bidirectional communication with WebSocket servers
- Support multiple serial data framing mechanisms based on length or time to convert serial data into Ethernet packets for various real-time requirements
- Support registration packets and heartbeat packets for connection authentication and link status detection
- Support Modbus Virtual ID to map real slave IDs to virtual IDs and avoid ID conflicts
- Support data encryption using DES, 3DES, AES, RC2, RC4, RC5, BlowFish and other algorithms to ensure data security
- Support SSL (TLS1.0/1.1/1.2) encryption with one-way/two-way certificate verification for secure connections
- Support web and SSH access control with IP and MAC address filtering
- Support event alarms for device reboot, login events, configuration changes, and password updates, with email and SNMP alarm reporting
- Support statistics for serial communication parameters, operating modes, and transmitted/received frame counts
- Support local log storage, network log storage, USB log backup, and serial log output

Technical Specifications

Software	
Network Protocol	IP, TCP, UDP, DNS, ARP, SNMP, SSH, ICMP, HTTP, DHCP Client, RFC2217, NTP, SMTP
IP Obtaining Method	Static IP/DHCP
DNS	Support
User Configuration	Web-based configuration, CONSOLE port for basic network settings, MixView for batch configuration
Simple Transparent Transmission	UDP Client, UDP Server, UDP Multicast, TCP Client, TCP Server, RealCOM, Pair Connection
Modbus	Modbus RTU/ASCII to Modbus TCP
Serial Port Packaging Mechanism	Support flexible serial data framing, adjustable by packet length or time interval, with a maximum packet length of 1460 bytes
TCP Server Connection	A single serial port supports up to 8 simultaneous TCP Client connections.
Network Buffer	Transmit: 16 Kbytes, Receive: 16 Kbytes
Serial Buffer	Transmit: 2 Kbytes, Receive: 2 Kbytes
Heartbeat Package	Support TCP Keep-alive mechanism, customize heartbeat packet content
Registration Package	Support customizable registration packet content.
RFC2217	Support
HTTPD Client	Support
WebSocket Client	Support
MQTT	Support Alibaba Cloud MQTT and other standard MQTT cloud platforms, including OneNet Multi-Protocol, OneNet IoT Suite, Huawei Cloud, and Tencent Cloud
RealCOM	Support

Data Encryption	Support DES, 3DES, AES, RC2, RC4, RC5, BlowFish and various padding modes
SSL Encryption	Support TLS 1.0, TLS 1.1, TLS 1.2
Serial Forwarding	Support disable, bidirectional forwarding, unidirectional forwarding, and unidirectional receive
Transmission Delay	<10ms
Supporting Software	Network management configuration tool and virtual COM software
Batch Upgrade	Support batch upgrade using MixView
Batch Configuration	Support batch configuration using MixView

Interface


1G Ethernet Port	2 × 10/100/1000 Base-T(X) auto-sensing RJ45 copper ports or 1000 Base-X SFP ports optional. The copper ports support full/half duplex and auto MDI/MDI-X. The SFP ports support 100/1000 Mbps.
Serial Port	Port type: 32×RS232/485/422 Connection: RJ45 Baud rate: 600~460800 bps Data bits: 7, 8 Stop bits: 1, 2 Parity: None, Odd, Even
USB	1 × Type-A USB 2.0 port, for log storage
CONSOLE	1 RJ45 port, RS232 signal, used for device debugging and command line configuration
Button	One-click restart, factory reset
Status LEDs	Power supply indicator, running indicator, alarm, Ethernet port indicator, serial port indicator

Power Supply

Input Voltage	AC85~264V / DC110~370V redundant power inputs
Power Consumption	< 16.2W@AC220V
Connection	AC socket with switch (three-pin type)
Physical Characteristic	
Dimensions	482.6×44×210 mm (including mounting brackets, excluding connectors)
Installations	19 inn 1U rack mount installation
IP Code	IP40
Weight	About 2.9 kg
Working Environment	
Operating Temp	-40℃~+75℃
Storage Temp	-40℃~+85℃
Relative Humidity	5%~95% (non-condensing)
Industrial Standard	
EMC	IEC 61000-4-2 (ESD): Level 4 (contact discharge ±8kV, air discharge ±15kV) IEC 61000-4-5 (Surge): Level 3 (Power supply: common mode ±2kV, differential mode ±2kV; RS485/422: common mode ±4kV, differential mode ±4kV; Ethernet port: common mode ±6kV, differential mode ±2kV) IEC 61000-4-4 (EFT): Level 4 (power supply: ±4kV; Ethernet port, serial port: ±2kV)
Certification	CE, FCC, RoHS

Dimensions

Unit: mm

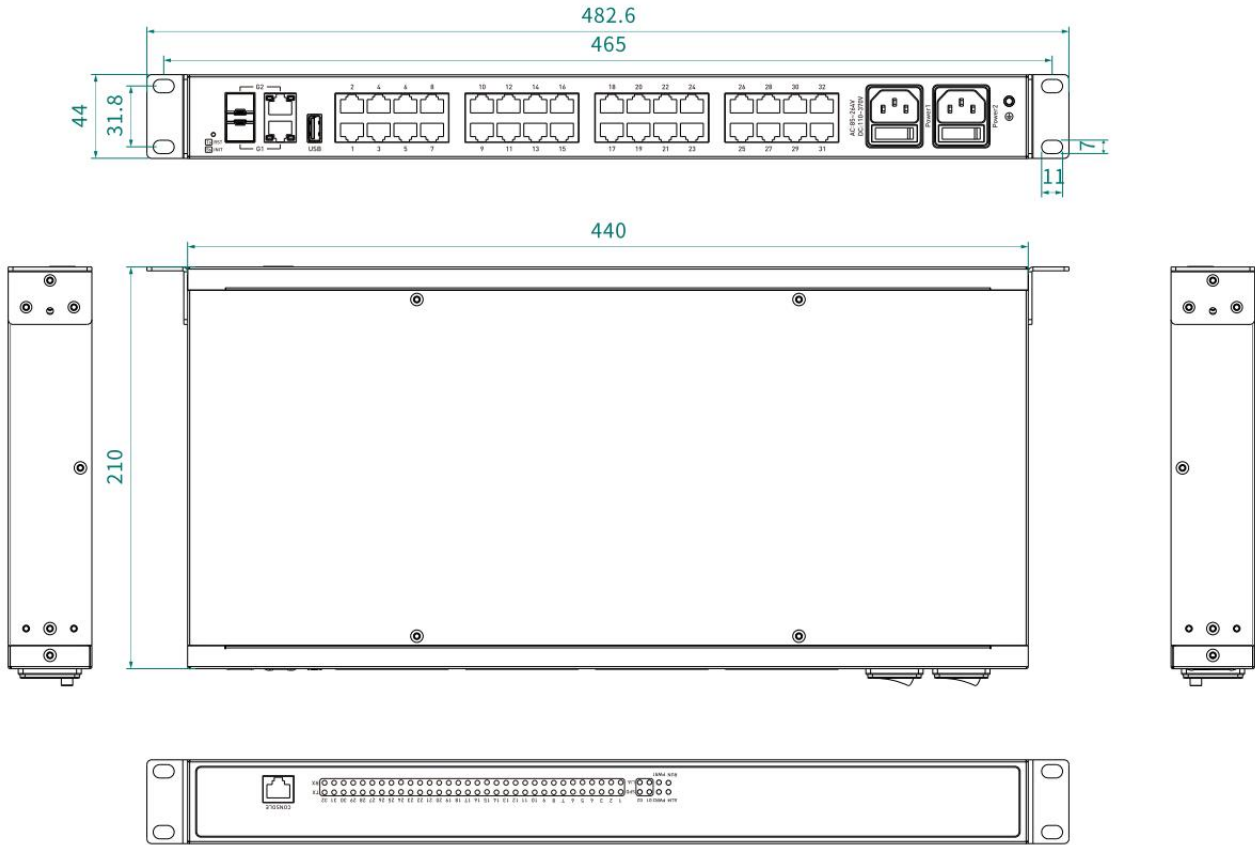

Ordering Information

Standard Model	1G Combo Port	RS232/485/422	Input Voltage
Cport3232-2AD220	2	32	AC85~264V / DC110~370V redundant power inputs



Contact Us

COME-STAR COMMUNICATION(WUHAN) CO., LTD.

Address: Puneng Industrial Park, Fenghuang Garden 1st Road, East Lake

High-Tech Development Zone, Wuhan, China.

Tel: +86-027-59257958

Mail: sales@come-star.com

Official site: www.come-star.com

Copyright © Come-Star All rights reserved