

CES8112GX-4XGF-8GC

12-Port Layer 3 10G Managed Embedded Industrial Ethernet Switch



- 4 x 10G SFP+ ports, 8 x 1G combo ports
- MW-Ring (recovery time < 20 ms @ 200 switches), EAPS, ERPS, STP/RSTP/MSTP for network redundancy
- Support static routing, RIPv1/v2, OSPF dynamic routing protocols
- Support VRRP to form a virtual router from multiple routing devices
- Support DDM digital diagnostic monitoring of SFP models
- DC12~24V dual power inputs
- -40°C to +70°C working temperature range

Product Description

CES8112GX-4XGF-8GC is a layer 3 10G managed embedded industrial ethernet switch with 4*10G SFP+ ports and 8*1G combo ports. This switch adopts a storage and forward mechanism, with powerful bandwidth processing capabilities, automatically troubleshooting data packet errors, reducing transmission failures, and easily supporting 10G networking to ensure stable, reliable, and efficient data transmission. It uses industrial grade components, combined with high standard system design and production control, embedded installation method, operating at a wide temperature range of -40°C to +70°C to adapt to various harsh working environments.

CES8112GX-4XGF-8GC follows the main communication standards in the industrial field, meeting technical requests of real-time communication and network security. It provides multiple ways to manage switches, such as accessing the switch command line (CLI) through the CONSOLE port or TELNET/SSH protocol, accessing the switch web interface through HTTP/HTTPS, and accessing the device MIB through the SNMP protocol. It supports multiple network protocols and industry standards, such as RIP, OSPF, VRRP, PIM, EAPS, ERPS, STP/RSTP/MSTP, VLAN, QoS, LACP, IGMP Snooping, GMRP, LLDP, 802.1X, ACL, DHCP, SNTP, port mirroring, Ping, Tracert etc. It supports system management such as uploading and downloading configuration files, and upgrading image files online. The product is widely applicable in fields such as comprehensive energy, smart cities, rail transit, intelligent transportation, smart factories, and industrial automation.

Product Features

- Support storm suppression for broadcast, multicast, and unknown unicast packets, detect broadcast and multicast packet storms, and prevent broadcast storms
- Support link static aggregation and dynamic aggregation LACP, which can increase transmission bandwidth, improve link reliability and realize network load balance
- Support 802.1Q VLAN, provide Access, Trunk, Hybrid interface easy to divide multiple broadcast domain, enhance the security of the network
- Support VLAN division based on port, MAC, protocol, IP subnetwork, etc., which can be applied to networks in different environments
- Support GVRP protocol, realize dynamic distribution, registration and propagation of VLAN attributes, and maintain dynamic VLAN
- Support the MAC address table and the aging time limit, and the static unicast / multicast MAC address is bound with the interface, to ensure the use of legitimate users
- Support PIM, IGMP, GMRP, IGMP Snooping multicast protocols to reduce the broadcast of multicast data in the network and save network resources
- Support LLDP link layer discovery protocol, obtains LLDP neighbor device information, monitors link status, facilitates topology management and fault localization
- Support ERPS Ethernet multi ring protection technology, provide multi ring networking, perform link backup, achieve fast convergence, and improve network stability
- Support EAPS loop protection protocol and MW-Ring ring network protocol, enhance the reliability of system communication
- Support STP, RSTP, MSTP generating tree protocol, which can eliminate network loop and improve network reliability
- Support VRRP virtual routing redundancy protocol, forming multiple routing devices into a virtual router to realize redundant backup and load sharing
- Support IPv4 static routing configuration, RIPv1/v2, OSPF dynamic routing protocol, realize routing and message forwarding
- Support HTTP, HTTPS, TELNET, SSH network access mode, SSH can provide a secure remote login
- Support SNMPv1/v2c/v3, information query, information modification and troubleshooting through the MIB network management system, to achieve centralized management
- Support QoS service quality, give priority to voice, video and important data in network devices, and solve network congestion
- Support ACL access control list, filtering TCP/UDP/ICMP/IGMP messages based on source/destination IP and MAC address
- Support 802.1X port authentication, authentication and access control for access users
- Support DHCPv4 server, centralized dynamic management and configuration of user IP addresses


Technical Specifications

Software	
Switching	Support port configuration, port speed limit, storm suppression, storm detection, static port trunk, LACP Support 802.1Q VLAN, port / MAC / subnet / protocol based VLAN division, GVRP, port isolation Support MAC address aging, static MAC address forwarding and filtering, MAC address binding and learning restrictions
Redundancy	Support MW-Ring ring network technology Support EAPS, ERPS Support STP/RSTP/MSTP
Multicast	Support IGMPv1/v2/v3, IGMP Snooping Support static multicast GMRP Support PIM-DM, PIM-SM
Routing	Support static routing Support RIPv1/ v2, OSPF dynamic routing Support VRRP
Security Management	Support HTTP, HTTPS, TELNET, and SSH access mode Support ACL and filtering data on the L2-L4 layer Support 802.1X port authentication and MAC address authentication Support lookback detection
Management and Maintenance	Support DHCP Client/Server/Relay/Snooping Support QoS, SNMP v1/v2c/v3, SNMP v1/v2c TRAP, LLDP Support port mirroring, Ping, Tracert, DDM Support user permission management, system logs, local time setting synchronization, and SNTP network time synchronization Support online restart, factory reset, system upgrade, configuration file upload/download Support unified upper-level software management
Switch Capability	

Processing Type	Store-and-Forward
Backplane Bandwidth	128Gbps
Buffer Size	12Mbit
MAC Table Size	16K
Interface	
10G Fiber Port	4*10GBase-R SFP+ ports, compatible with 1000Base-X
Gigabit Combo Port	8*1G Combo ports, support 10/100/1000Base-T(X) auto-sensing copper port or 1000Base-X SFP port, the copper port supports full/half duplex, auto MDI/MDI-X
CONSOLE	1*CONSOLE port, RS232 signal RJ45 port, used for device debugging
Status LED	Power LED, operation LED, alarm LED, port LED. Support external output of indicator signals
Power Supply	
Input Voltage	DC12~24V dual power inputs
Full load power consumption	<20W@DC12V
Connection	5.08mm pitch 2-pin terminal block
Physical Characteristics	
Dimensions	185×135×67.6 mm (excluding connectors)
Installations	Embedded
Weight	About 0.65kg
Working Environment	
Operating Temp	-40°C to +70°C
Storage Temp	-40°C to +85°C
Relative Humidity	5%~95% (non-condensing)

Dimensions

Unit: mm

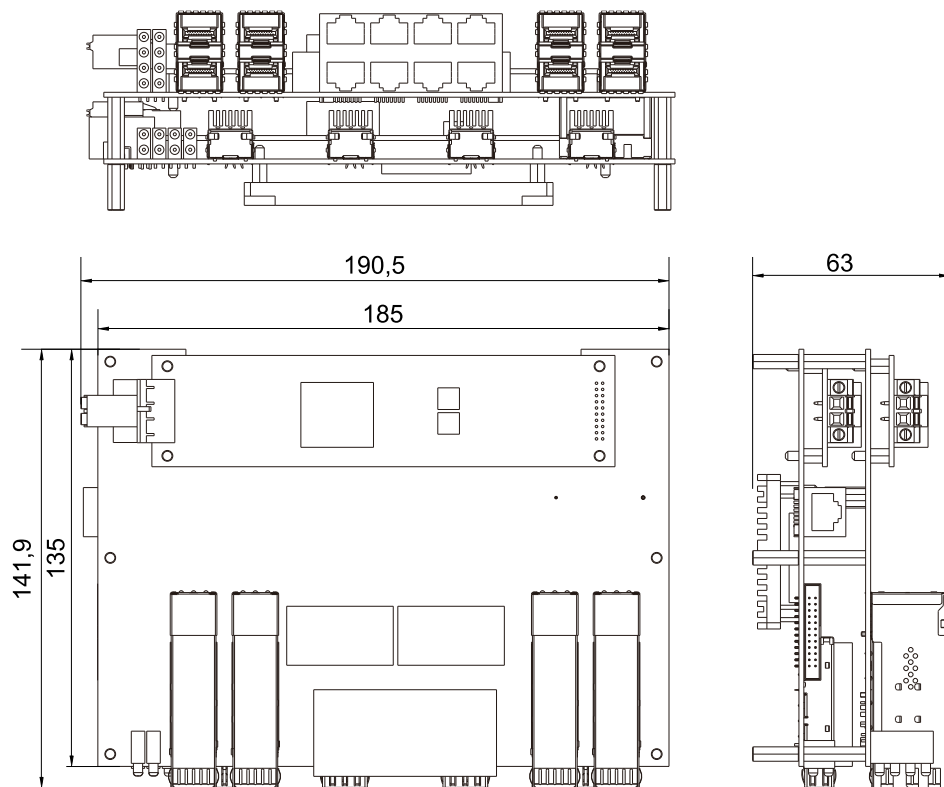

Ordering Information

Standard Model	10G SFP port	1G Combo port	Input Voltage
CES8112GX-4XGF-8GC	4	8	Dual DC12~24V



Contact Us

COME-STAR COMMUNICATION(WUHAN) CO., LTD.

Address: Puneng Industrial Park, Fenghuang Garden 1st Road, East Lake High-Tech Development Zone, Wuhan, China.

Tel: +86-027-59257958

Mail: sales@come-star.com

Official site: www.come-star.com

Copyright © Come-Star All rights reserved